


Model	Indoor Unit		SLZ-KA09NA
	Outdoor Unit		SUZ-KA09NA
Capacity (Rated)	Cooling	Btu/h	8,400
Capacity (Min. ~ Max.)		Btu/h	3,100 ~ 10,900
Capacity (Rated)	Heating @ 47°F	Btu/h	10,900
Capacity (Min. ~ Max.)		Btu/h	3,100 ~ 14,100
Capacity	Heating @ 17°F	Btu/h	8,300
Power Consumption (Total Input)	Cooling	W	700
	Heating @ 47°F	W	930
	Heating @ 17°F	W	1,040
EER		Cooling	12.0
SEER		Cooling	15.0
HSPF (IV)		Heating	9.6
Capacity Control			Variable Speed Compressor
Refrigerant			R-410A
Power Supply		V, Phase, Hz	208/230, 1, 60
Moisture Removal		Pints/h	1.2
Airflow (Low-Med-Hi)		CFM Dry	280-320-350
Sound Indoor (Low-Med-Hi)	Cooling	dB(A)	29-32-38
Sound Outdoor	Cooling	dB(A)	46
Max. Fuse Size (Time Delay)	Indoor	A	15
	Outdoor	A	15
Min. Ampacity	Indoor	A	1.0
	Outdoor	A	12
Fan Speed Control			4 (Auto, Hi, Med, Low)
Up/Down Airflow Directions			Auto, Manual, Swing
Air Filter (Washable)			Long-Life Filter (up to 2,500 hours)
Dimension (H x W x D)	Indoor	in.	8-3/16 x 22-7/16 x 22-7/16
	Grille	in.	13/16 x 25-5/8 x 25-5/8
	Outdoor	in.	21-5/8 x 31-1/2 x 11-1/4
Weight	Indoor	lbs.	36
	Grille	lbs.	7
	Outdoor	lbs.	66
Pipe Size	Liq. X Gas	in.	1/4 x 3/8
Max. Height Difference		ft.	40
Max. Pipe Length		ft.	65
Outdoor Operating Range		Cooling Heating	14 – 115°FDB -4 – 75°FDB (-5 – 65°FWB)

THIS SYMBOL DENOTES AN ENERGY STAR-CERTIFIED UNIT

All features may not apply to all models. Ask your dealer for details.

# Single 4-way cassette split systems

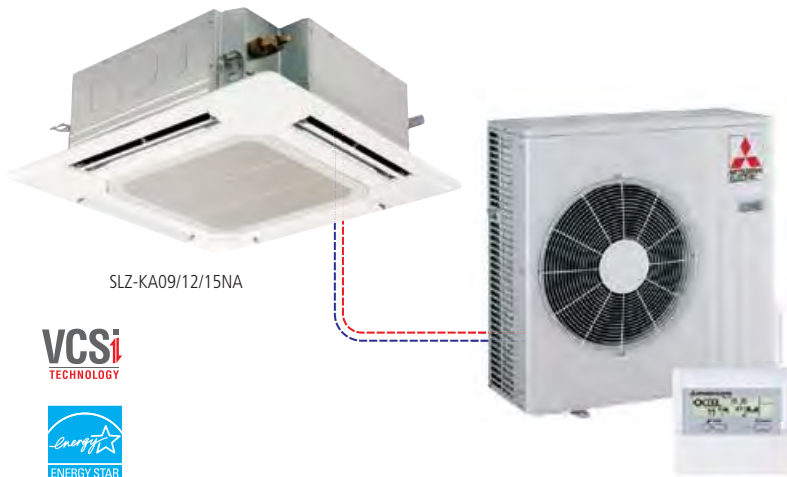

SLZ-KA09/12/15NA



Optional accessories available.  
Visit [www.mrslim.ca](http://www.mrslim.ca) for more information.

## Heat pump

- Variable Compressor Speed Inverter Technology
- Ozone-Friendly R-410A Refrigerant
- Significant Energy Savings (up to 30%)
- Auto Change Over Between Cooling & Heating
- Super Quiet Technology
- Long-Life Filter – Up to 2,500 hrs
- Four-Way Airflow Directions
- Wide Outlets for Better Air Distribution
- Built-in High-Performance Drain Pump
- Connectable to Fresh Air Supply
- Low Ambient Heating -20°C/-4°F
- Refrigerant Pre-Charged
- 5-Year Parts Warranty
- 7-Year Compressor Warranty

SLZ-KA12NA	SLZ-KA15NA
SUZ-KA12NA	SUZ-KA15NA
11,100	15,000
3,400 ~ 13,300	3,800 ~ 17,700
13,600	18,000
3,100 ~ 17,100	3,100 ~ 22,200
10,200	13,400
920	1,460
1,180	1,950
1,310	1,970
12.0	10.2
15.4	16.0
9.6	9.6
Variable Speed Compressor	Variable Speed Compressor
R-410A	R-410A
208/230, 1, 60	208/230, 1, 60
2.3	4.5
280-320-390	280-320-390
30-34-39	31-35-40
49	49
15	15
15	15
1.0	1.0
12	12
4 (Auto, Hi, Med, Low)	4 (Auto, Hi, Med, Low)
Auto, Manual, Swing	Auto, Manual, Swing
Long-Life Filter (up to 2,500 hours)	Long-Life Filter (up to 2,500 hours)
8-3/16 x 22-7/16 x 22-7/16	8-3/16 x 22-7/16 x 22-7/16
13/16 x 25-5/8 x 25-5/8	13/16 x 25-5/8 x 25-5/8
21-5/8 x 31-1/2 x 11-1/4	21-5/8 x 31-1/2 x 11-1/4
36	36
7	7
77	80
1/4 x 3/8	1/4 x 1/2
40	40
65	65
14 – 115°FDB	14 – 115°FDB
-4 – 75°FDB (-5 – 65°FWB)	-4 – 75°FDB (-5 – 65°FWB)

All test conditions are based on ARI 210/240.

Rating conditions: Cooling – Indoor: 80°FDB, 67°FWB; Outdoor: 95°FDB, 75°FWB; Rated frequency  
Heating – Indoor: 70°FDB, 60°FWB; Outdoor: 47°FDB, 43°FWB; Rated frequency